


YOUR PRODUCT IDENTIFICATION EXPERTS

XPA 9xx

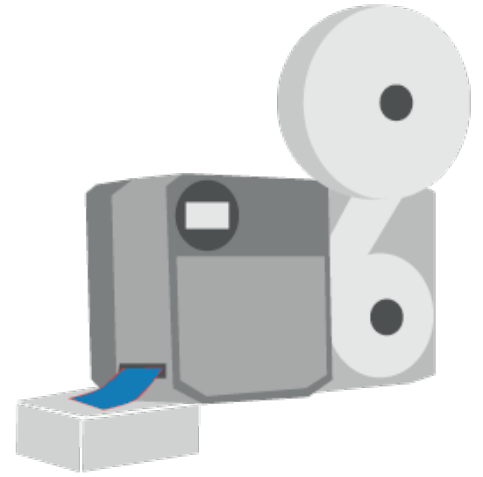

Print & Apply Labellers

Model Range:

- XPA 934
- XPA 935
- XPA 936
- XPA 944



Perfect Print, Rugged & Robust, Compact without Compromise

PRINT & APPLY LIKE NEVER BEFORE

Do you need a reliable Print & Apply System that can process variable data and applies labels quickly and precisely on any type of product? The XPA 9xx offers excellent print results even at high application speeds and labels your products in real time - in 4", 5" or 6" print width.

The most compact Print & Apply System on the market can be flexibly integrated into all production lines. It is capable of meeting any industrial identification challenge and supply chain application.



INTUITIVE DISPLAY

- Large, multi-coloured display with high contrast
- Intuitive, icon-guided navigation with customer-specific "favourites" menu
- Readable with cover open and closed



ROTATABLE DISPLAY

- Completely free rotatable display
- Readable and operable from any position, even when installed upside down
- In industrial environments, can be operated with gloves

ROBUST AND DURABLE

- High-quality product components such as robust housing with sturdy metal frame
- Strong thread inserts for extra stability
- The design without fan prevents dust admission



EXTRA COMPACT AND FLEXIBLE

- The XPA 9xx is the most compact Print & Apply System on the market with a very small footprint
- Can be mounted in any conceivable position on the production line (top, side, bottom labelling)
- Various mounting possibilities of optional accessories e.g. label unwinder or applicators to perfectly suit your application
- Weighs less than 30 kg with increased durability at the same time

FOR 4", 5" AND 6" PRINT WIDTHS

- For all requirements: The XPA 93x/944 is available for 4" (106 mm), 5" (127mm), and 6" (160mm) print widths
- Up to 185mm label width
- Perfect for labelling products, cartons and pallets




RIBBON SAVE FUNCTION

- The transport of the thermal transfer ribbon stops at areas where the label does not need to be printed
- Lower ribbon consumption
- Reduced costs
- Longer print head life
- Less downtime
- Protects the environment: less waste & chemicals



SMART ACCESS

- The XPA 9xx can be remotely controlled from any PC, mobile device or industrial panel PC
- Enables remote setup, diagnostics and maintenance
- Increased flexibility and maximum user-friendliness



OUTSTANDING PRINT QUALITY

- 300 dpi print resolution ensures perfect print results – even at high application speeds thanks to thermal transfer technology



FAST CHANGE OF MATERIAL

- Particularly quick and easy insertion of label and ribbon material
- Reduces downtimes and therefore increases the production times

EASY MAINTENANCE AND CLEANING

- 100% tool-free maintenance and replacement of wear parts e.g. print head or silicone rollers
- Open print module for easy cleaning



AUTOMATIC SETTINGS

- Continuous adjustment of ribbon and label material tension for best print results
- Automatic setting of print head parameters such as pressure and contrast




QR codes take you to videos showing the XPA 9xx in action and give you a closer look at some of its functions and special features. Scan the codes with your smart phone and convince yourself of the outstanding features of the XPA 9xx!

XPA 9xx SPECIFICATIONS

Print Width (max)	XPA 934 / 944: 106 mm XPA 935: 127 mm XPA 936: 160 mm	Character Sets	Internal fixed and scaleable fonts including OCR-A & OCR-B, supports TrueType & Unicode
Material Width (max)	XPA 934 / 944: 120 mm XPA 935 / 936: 185 mm	Barcodes	25 x Linear Barcodes, 6 x 2-D Matrix & Stacked Codes, 12 x GS1 Databar & CC codes
Label Length	10 - 1,000 mm	Software	Drivers for Windows 11 & most popular labelling packages, such as; design.ID, NiceLabel & others
Print & Dispensing Speed (max)	XPA 934: 300 mm/s XPA 935 / 936: 250 mm/s XPA 944: 400 mm/s	Material Specifications	Self-adhesive, die-cut labels on backing liner. Thermal direct & thermal transfer materials, including PE, PP, PVC, PA Weight: 60 - 160 gsm.
Print Technology	12 dots/mm (300 dpi) Thermal direct & thermal transfer, near-edge print head	Label Roll	Max Outer Ø: 300 mm Inside Core Ø: 38.1 mm, 76.2 mm or 101.6 mm
Operating Panel	Colour backlit display, 128 x 64 matrix 5 push-buttons Rotatable 360°	Interfaces	Data: Ethernet 10/100/1000, 1 x USB 2.0 (A), 2 x USB 2.0 (B), RS232 D-Sub 9 Signals Standard: Start sensor, Beacon, Roll (OD). Signals Optional: Connections for applicators & machine status signals
Emulation	Zebra ZPL, EasyPlug, Line Printer, Hex Dump	Ribbon Specifications	25 mm - 170 mm Anti-friction, back-coated, near-edge compatible
Label Dispensing	+/- 0.5 mm	Size H x W x D (mm)	XPA 934 / 944: 639 x 546 x 363 mm Weight: 27 Kg XPA 935 / 936: 639 x 546 x 428 mm Weight: 33 Kg

Options: ○ Extended Dispense Edge (Direct Apply) ○ LA-TO (Touch-On)
○ LA-SO (90° Swing-On Tamp) ○ LA-BO (Blow-On) ○ LA-CE (Corner-Edge)

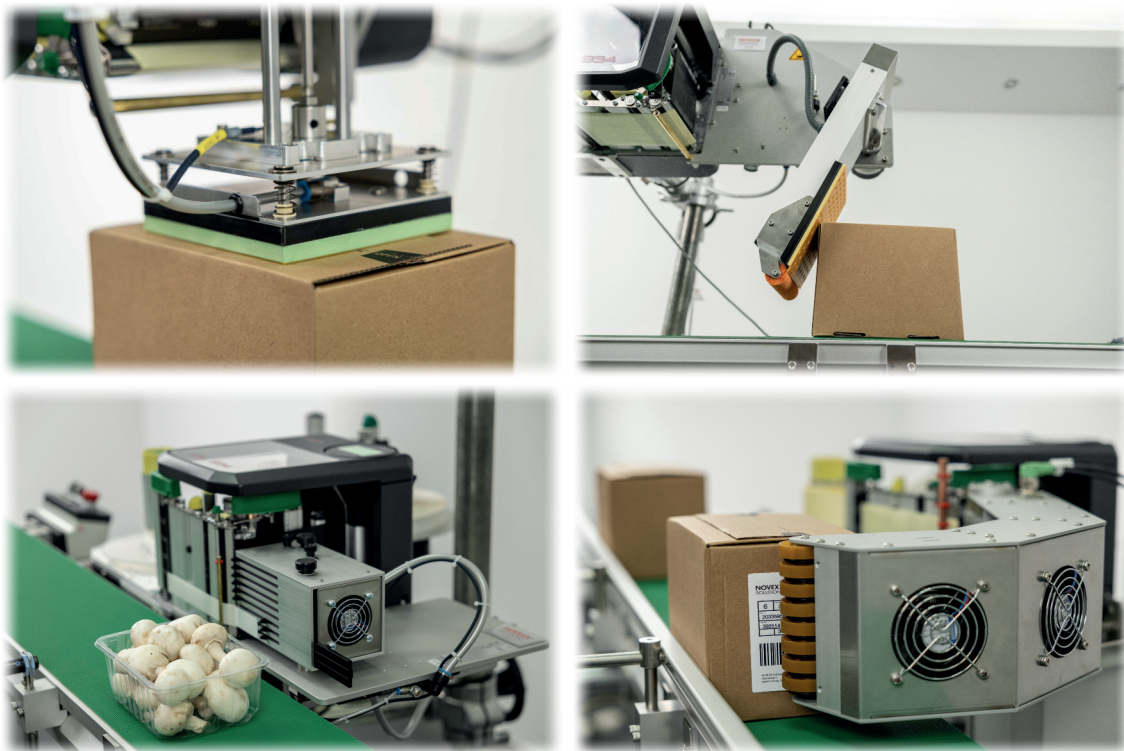

NOVEXX
SOLUTIONS

Novexx Solutions GmbH
Ohmstraße 3
85386 Eching
Germany
+49 (0)8165 925-0
www.novexx.com



Authorised Distributor:



Unit B, Bandet Way, Thame
Oxfordshire, United Kingdom
+44 (0)1844 213177 sales@als-uk.com
www.als-uk.com



0026